

Docket No.: 26432-0009
Patent No.: 7,096,681 B2

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

Patent No.: 7,096,681 B2

Issued: August 29, 2006

Inventors: WILLS et al.

Attorney Docket No.: 26432-0009

Title: SYSTEM AND METHOD FOR VARIABLE
SPEED OPERATION OF A SCREW
COMPRESSOR

Confirmation No.: 7753

Group Art Unit: 3744

Examiner: Marc E. NORMAN

Certificate of Corrections Branch
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

REQUEST FOR CERTIFICATE OF CORRECTION

Pursuant to 35 U.S.C. § 254 and 37 C.F.R. § 1.322, this is a request for the issuance of a Certificate of Correction in the above-referenced patent. A copy of form PTO/SB/44 consisting of one (1) page is included herewith and comprises the complete Certificate of Correction.

The mistakes and/or omissions in the above-referenced patent that are identified on the included form PTO/SB/44 were incurred through the fault of the U.S. Patent and Trademark Office (USPTO) as clearly disclosed in the records of the USPTO (see Corrected Filing Receipt dated October 29, 2004).

Issuance of the Certificate of Correction containing the corrections listed on the included form is respectfully requested.

Respectfully Submitted,
McNees Wallace & Nurick LLC
/Brian T. Sattizahn/

Dated: July 8, 2008

Brian T. Sattizahn
Attorney for Applicant
Reg. No. 46,401
100 Pine Street
P.O. Box 1166
Harrisburg, PA 17108-1166

Phone: (717) 232-8000
Fax: (717) 237-5300

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 7,096,681 B2

APPLICATION NO.: 10/788,723

ISSUE DATE : August 29, 2006

INVENTOR(S) : Frank Eugene WILLIS, Harold Robert SCHNETZKA, Douglas Alan KESTER, John F. JUDGE,
Mahesh VALIYA NADUVATH, and Israel FEDERMAN

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Front Page, Inventors (75), Replace "Mahesh VALIYA-NADUVATH" with "Mahesh VALIYA NADUVATH".

MAILING ADDRESS OF SENDER (Please do not use customer number below):

McNees Wallace & Nurick, LLC
100 Pine Street, P.O. Box 1166
Harrisburg, PA 17108-1166

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.



US007096681B2

(12) **United States Patent**
Wills et al.

(10) **Patent No.:** **US 7,096,681 B2**

(45) **Date of Patent:** **Aug. 29, 2006**

(54) **SYSTEM AND METHOD FOR VARIABLE SPEED OPERATION OF A SCREW COMPRESSOR**

(75) Inventors: **Frank Eugene Wills**, York, PA (US); **Harold Robert Schnetzka**, York, PA (US); **Douglas Alan Kester**, York, PA (US); **John F. Judge**, Stewartstown, PA (US); **Mahesh Valiya-Naduvath**, Lutherville, MD (US); **Israel Federman**, York, PA (US)

(73) Assignee: **York International Corporation**, York, PA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/788,723**

(22) Filed: **Feb. 27, 2004**

(65) **Prior Publication Data**

US 2005/0188708 A1 Sep. 1, 2005

(51) **Int. Cl.**

F25B 7/00 (2006.01)

F25B 1/00 (2006.01)

F25B 49/00 (2006.01)

(52) **U.S. Cl.** **62/175; 62/228.1; 62/230; 62/510; 417/2; 417/44.1; 417/45**

(58) **Field of Classification Search** **62/175, 62/201, 228.1, 228.4, 230, 498, 510; 417/2, 417/22, 15, 44.1, 45**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,390,320 A 6/1968 Kammiller et al.

3,621,365 A 11/1971 Beck et al.

3,909,687 A 9/1975 Abbondanti

4,150,425 A 4/1979 Nagano et al.

4,151,725 A 5/1979 Kountz et al.

4,152,902 A 5/1979 Lush

4,492,546 A 1/1985 Hartwig et al.

4,546,423 A 10/1985 Seki

4,656,571 A 4/1987 Umezu et al.

4,787,211 A 11/1988 Shaw

4,879,639 A 11/1989 Tsukahara et al.

(Continued)

FOREIGN PATENT DOCUMENTS

DE 100 03 869 A1 8/2001

(Continued)

OTHER PUBLICATIONS

Murphy, J.M.D., "Thyristor Control of A.C. Motors", Principles of Variable-Frequency A.C. Drives, Oct. 10, 1975, pp. 3-4, 111-114, & 120-121, Pergamon Press, New York.


Primary Examiner—Marc Norman

(74) *Attorney, Agent, or Firm*—McNees Wallace & Nurick LLC

(57) **ABSTRACT**

A system and method are provided for variable speed operation of a screw compressor to obtain increased capacity and efficiency. The screw compressor is connected to an induction motor driven by a variable speed drive, wherein the screw compressor has a variable output capacity that is dependent on the output speed of the motor. To obtain increased capacity and efficiency, the screw compressor is operated at a speed greater than the screw compressor's rated speed and does not include a slide valve. The maximum operating speed of the screw compressor, which speed is greater than the rated speed, is related to the maximum operating speed of the motor when operated at a voltage and frequency provided by the variable speed drive that is greater than the motor's rated voltage and frequency in a constant flux or constant volts/Hz mode.

35 Claims, 4 Drawing Sheets

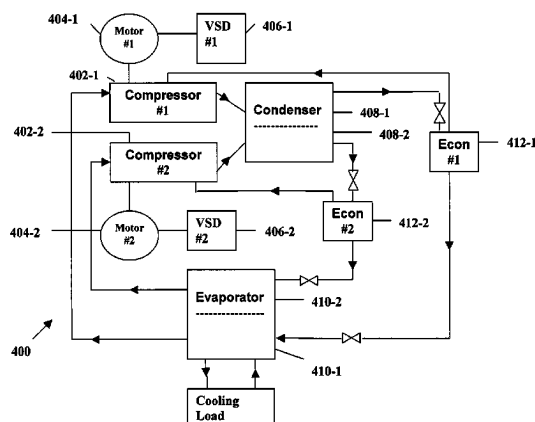

US 7,096,681 B2

Page 2

U.S. PATENT DOCUMENTS

4,958,118 A 9/1990 Pottebaum
5,010,287 A 4/1991 Mukai et al.
5,350,992 A 9/1994 Colter
5,446,645 A 8/1995 Shirahama et al.
5,488,279 A 1/1996 Kawamoto et al.
5,492,273 A 2/1996 Shah
5,503,248 A 4/1996 Peruggi et al.
5,509,504 A 4/1996 McHugh et al.
5,528,114 A 6/1996 Tokizaki et al.
5,845,509 A 12/1998 Shaw et al.
6,008,616 A 12/1999 Nagayama et al.
6,018,957 A 2/2000 Katra et al.
6,031,738 A 2/2000 Lipo et al.
6,124,697 A 9/2000 Wilkerson
6,185,946 B1 2/2001 Hartman
6,229,722 B1 5/2001 Ichikawa et al.
6,325,142 B1 12/2001 Bosley et al.
6,370,888 B1 4/2002 Grabon
6,408,645 B1 6/2002 Tsuboe et al.

6,434,960 B1 8/2002 Rousseau
6,459,596 B1 10/2002 Corzine
6,459,606 B1 10/2002 Jadric
6,579,067 B1 6/2003 Holden
2003/0041605 A1 3/2003 Butcher et al.
2003/0098668 A1* 5/2003 Jadric et al. 318/801

FOREIGN PATENT DOCUMENTS

DE 1004 7629 4/2002
EP 0 695 024 A2 1/1996
EP 704 784 4/1996
EP 1 022 844 A2 7/2000
EP 1 055 885 A2 11/2000
GB 1579045 11/1980
JP 57 018484 5/1982
JP 60102878 6/1985
WO WO 97/18420 5/1997
WO WO 03/044939 5/2003

* cited by examiner

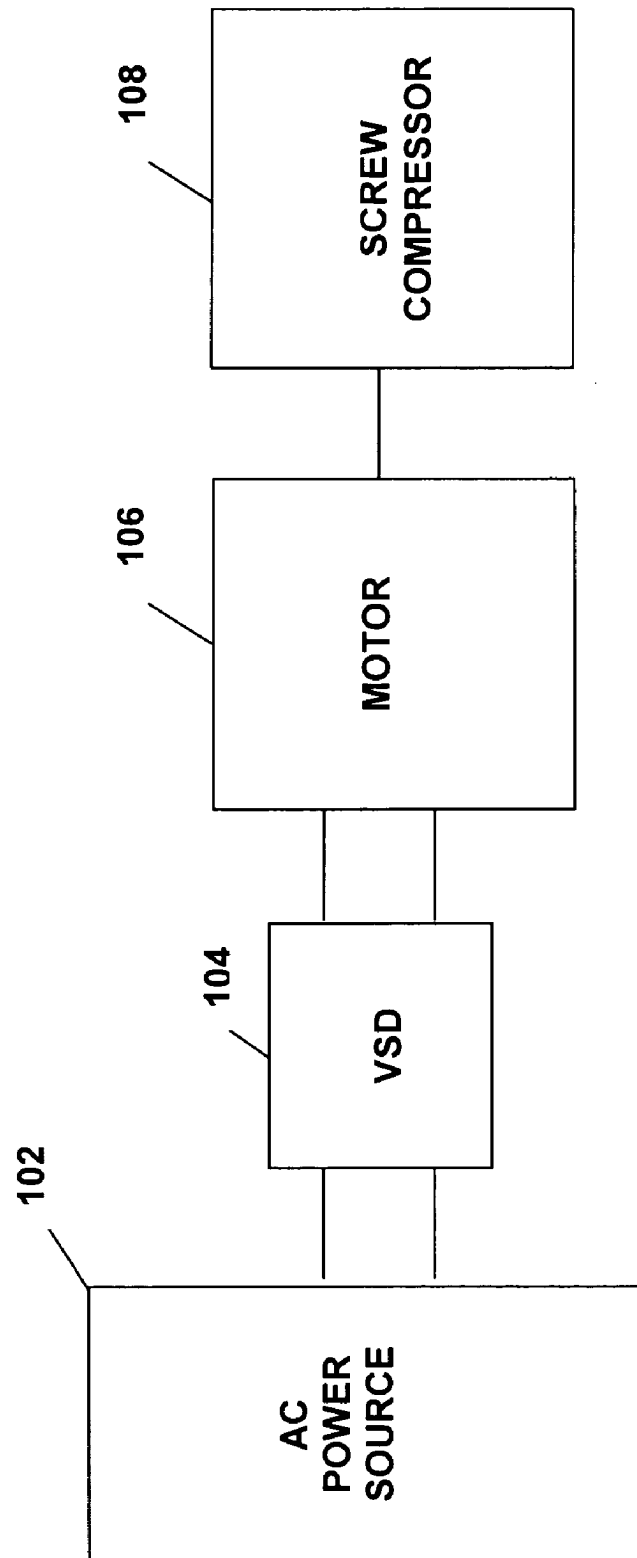


Figure 1

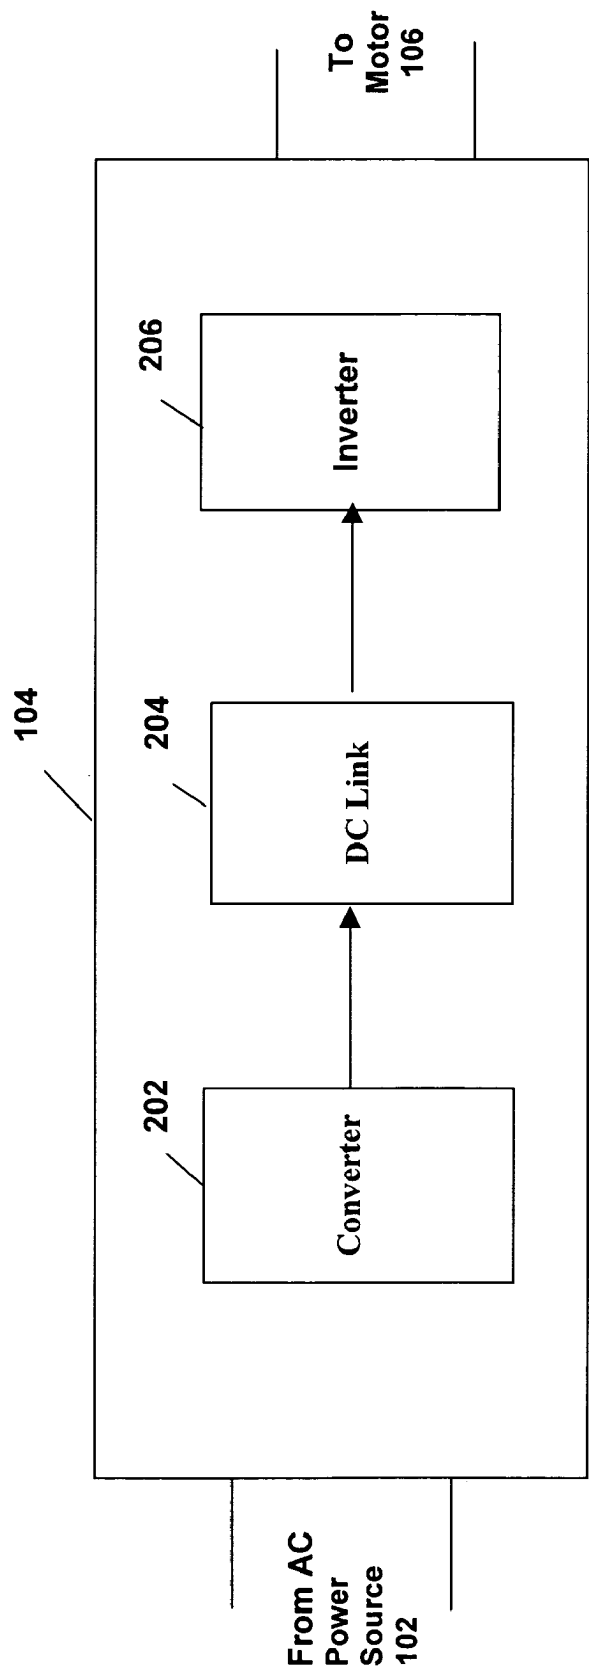


Figure 2

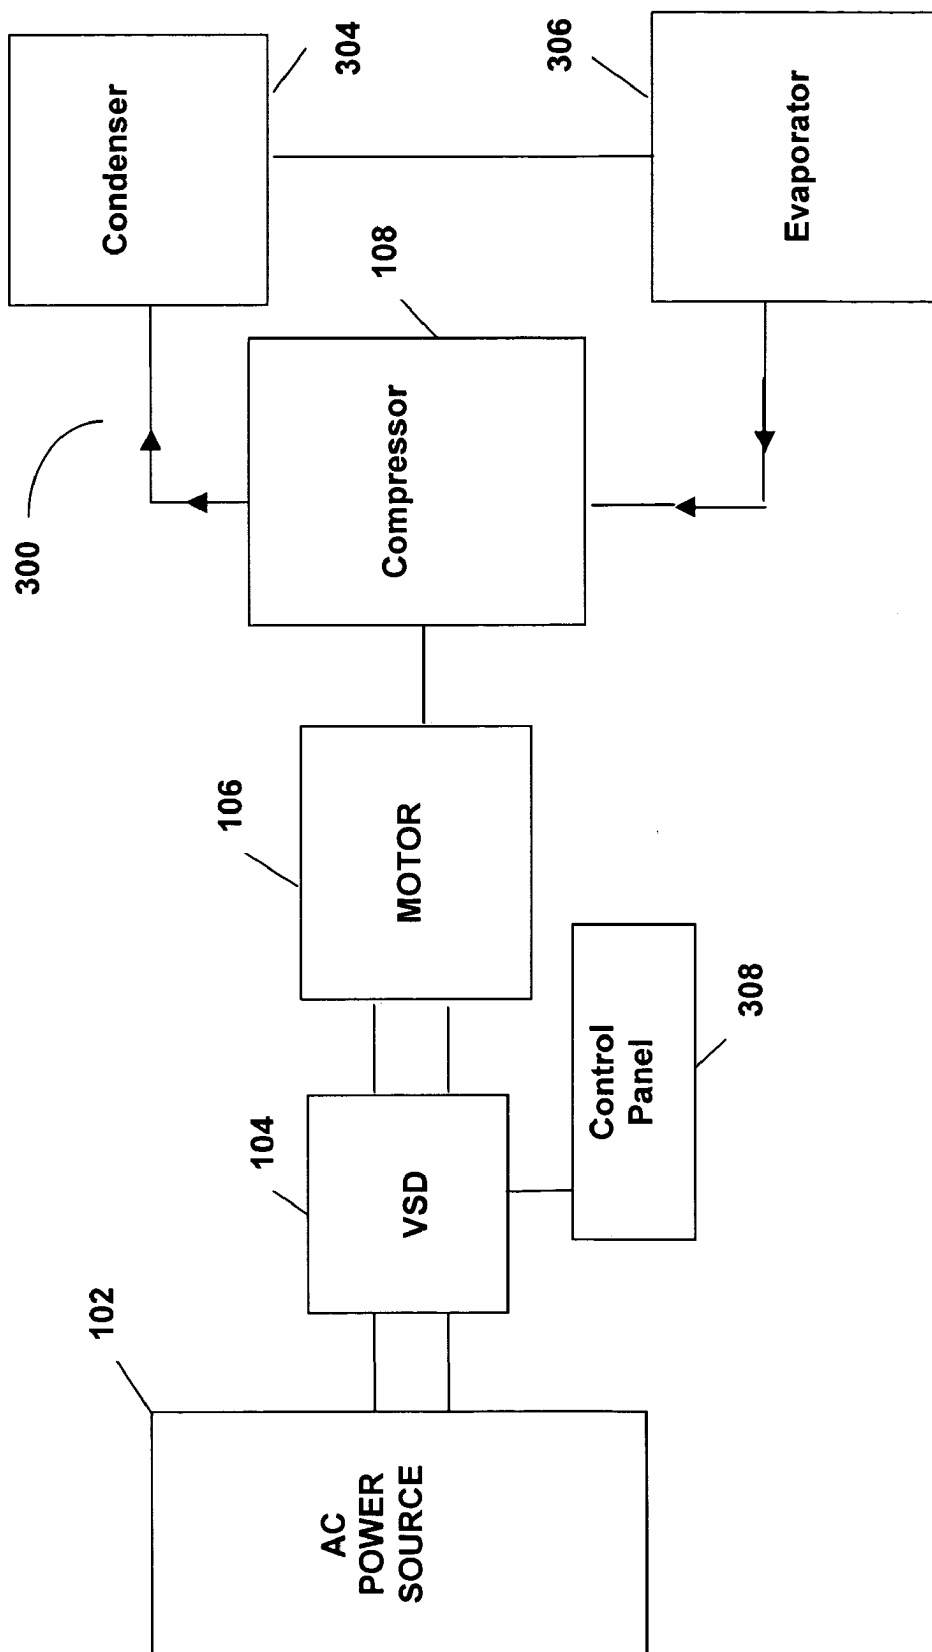


Figure 3

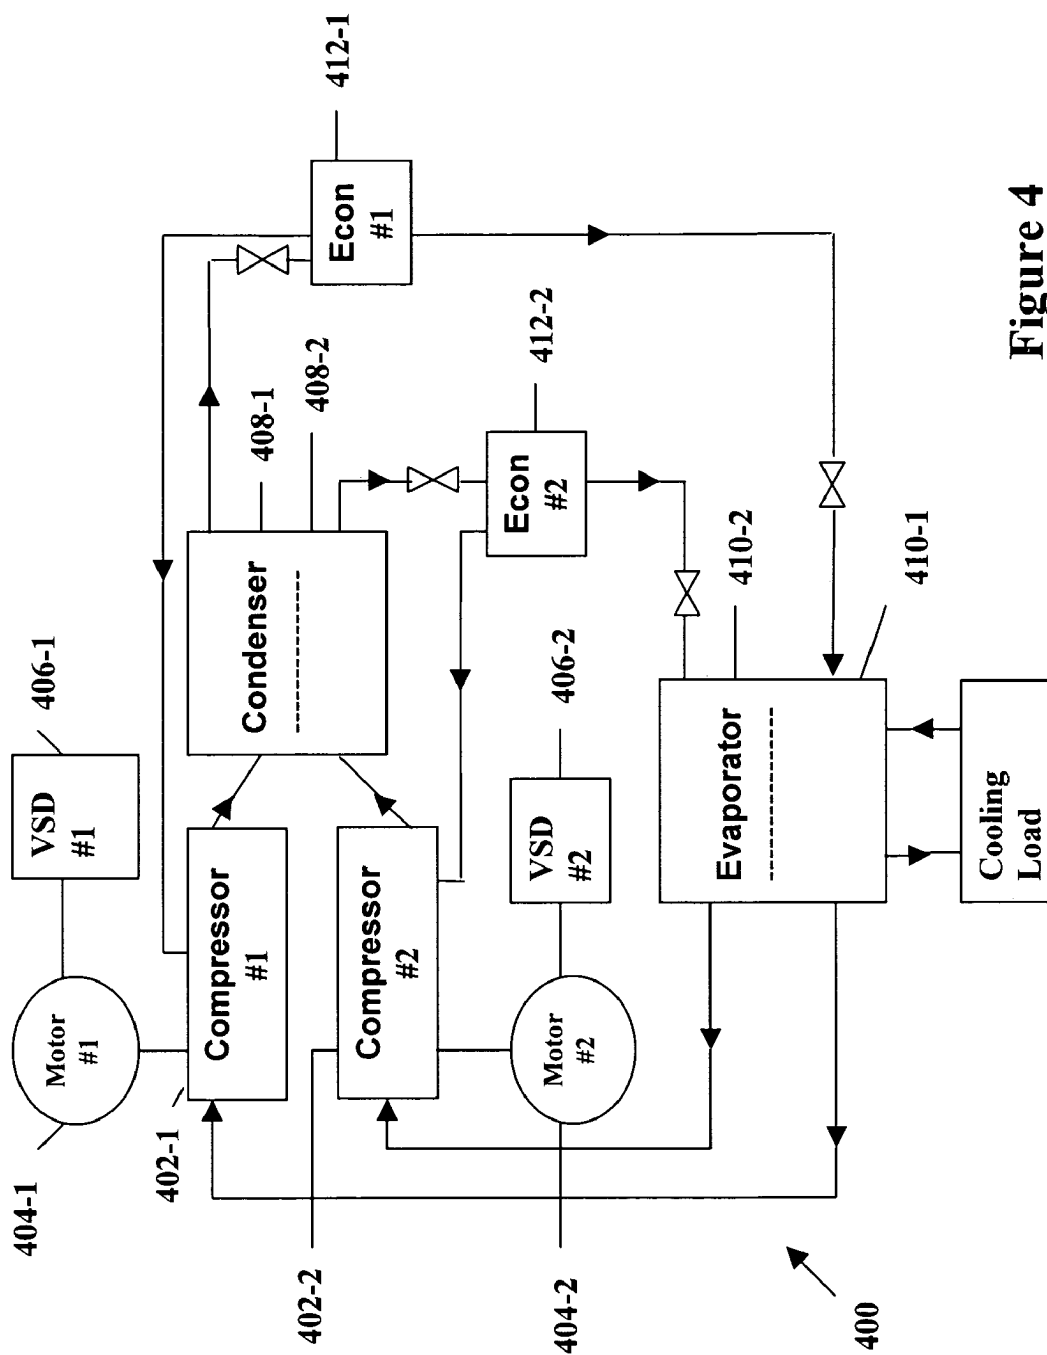


Figure 4

1

SYSTEM AND METHOD FOR VARIABLE SPEED OPERATION OF A SCREW COMPRESSOR

BACKGROUND OF THE INVENTION

The present invention relates generally to the operation of a screw compressor. More specifically, the present invention relates to the variable speed operation of a screw compressor connected to a motor powered by a variable speed drive that can provide the motor an input voltage and frequency greater than the motor's rated voltage and frequency.

The capacity of a screw compressor is based on the amount of gas entering the screw compressor and the rotational speed of the screws or rotors compressing the gas. In the past, the speed of the rotors of a screw compressor was limited to the maximum rated output speed of the induction motor driving the rotors of the screw compressor. This single speed screw compressor would have a single output capacity based upon the rotor speed in the screw compressor. To get a rotor speed greater than the maximum rated speed of the induction motor and a corresponding increase in the output capacity of the screw compressor, a gearing arrangement had to be connected between the motor and rotors of the screw compressor. However, the introduction of the gearing arrangement to obtain increased rotor speeds in the screw compressor resulted in a reduction in the efficiency of the compressor system and increased cost and maintenance for the compressor system. In addition, the screw compressor still only has one output capacity because the rotors are still being driven at a single (albeit faster) speed.

Next, several techniques were developed to obtain a variable capacity in a screw compressor. In one technique, the screw compressor includes a slide valve to obtain variable capacities. The slide valve operates to divert a portion of the gas being compressed by the rotors away from the compressor discharge. Often, the gas diverted by the slide valve is returned to the suction inlet of the compressor. While the incorporation of a slide valve can provide a variable output capacity screw compressor, there are several drawbacks to using a slide valve. First, the slide valve provides a leakage passageway for gas, thereby reducing the efficiency of the compressor. Next, the incorporation of a slide valve in a screw compressor involves a complicated machining process and a corresponding increased cost. Finally, the maximum rotor speed and capacity of the screw compressor are based on the maximum rated speed of the motor and a gearing arrangement would be required to obtain a rotor speed greater than the rated motor speed.

Another technique for obtaining a variable capacity in a screw compressor involves connecting the motor of the screw compressor to a variable speed drive. The variable speed drive can vary the frequency and/or voltage that is provided to the motor to vary the output speed of the motor, which, in turn, varies the speed of the rotors to obtain variable output capacities of the screw compressor. However, most variable speed drives are not capable of providing an output voltage greater than the input voltage. This limitation on the output voltage of the variable speed drive limits the maximum speed of the motor to a speed that corresponds to the speed of the motor operated at line voltage. As discussed above, to obtain greater rotor speeds in the compressor, a gearing arrangement has to be incorporated between the motor and the rotors to increase the output rotational speed of the motor driving the rotors of the compressors.

2

Therefore, what is needed is a system and technique for variable speed operation of a screw compressor that does not involve a slide valve and can provide increased rotor speeds without the use a gearing arrangement.

SUMMARY OF THE INVENTION

One embodiment of the present invention is directed to a method of increasing the output capacity of a screw compressor. The method includes the steps of providing a motor having a predetermined rated operational voltage and frequency and providing a variable speed drive capable of supplying a voltage and frequency to the motor greater than the predetermined rated operational voltage and frequency of the motor. The predetermined rated operational voltage and frequency of the motor generates a predetermined output speed of the motor. Next, a screw compressor is connected to the motor. The screw compressor has a predetermined output capacity in response to operation at the predetermined output speed of the motor. The variable speed drive is operated to supply a voltage and frequency to the motor greater than the predetermined rated operational voltage and frequency of the motor. The motor generates an output speed greater than the predetermined output speed of the motor as a result of the supplied voltage and frequency to the motor being greater than the predetermined rated operational voltage and frequency of the motor. Finally, the screw compressor is driven at the generated speed of the motor, which is greater than the predetermined output speed of the motor to obtain an output capacity greater than the predetermined output capacity of the screw compressor.

Another embodiment of the present invention is directed to a compression system including a motor having a predetermined rated operational voltage and frequency, a variable speed drive connected to the motor to power the motor, and a screw compressor connected to the motor. The motor is configured to generate a predetermined output speed in response to operating at the predetermined rated operational voltage and frequency. The variable speed drive is configured to supply a variable output voltage and variable output frequency to the motor. The variable output voltage and variable output frequency ranges between an output voltage and output frequency less than the predetermined rated operational voltage and frequency, and an output voltage and output frequency greater than the predetermined rated operational voltage and frequency. The screw compressor is configured to provide a predetermined output capacity in response to being driven at the predetermined output speed of the motor. The motor can generate an output speed greater than the predetermined output speed in response to operation at a supplied voltage and frequency greater than the predetermined rated operational voltage and frequency, and the screw compressor provides an output capacity greater than the predetermined output capacity in response to being driven at an output speed of the motor greater than the predetermined output speed of the motor.

One advantage of the present invention is more efficient screw compressor operation from increased rotor speeds that reduce gas leakage and increase the rotor seal.

Another advantage of the present invention is that the operating efficiency, speed and horsepower of an induction motor can be increased.

Still another advantage of the present invention is that increased system efficiency can be obtained at part or partial load conditions.

A further advantage of the present invention is that increased compressor capacity can be obtained.

Yet another advantage of the present invention is that one motor and compressor configuration can be used with a variety of input voltages and frequencies.

Other features and advantages of the present invention will be apparent from the following more detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings which illustrate, by way of example, the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates schematically a general system configuration of the present invention.

FIG. 2 illustrates schematically one embodiment of a variable speed drive used in the present invention.

FIG. 3 illustrates schematically a refrigeration system that can be used with the present invention.

FIG. 4 illustrates schematically another embodiment of a refrigeration system that can be used with the present invention.

Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates generally the system configuration of the present invention. An AC power source **102** supplies a variable speed drive (VSD) **104**, which powers a motor **106** that drives a screw compressor **108**. The AC power source **102** provides single phase or multi-phase (e.g., three phase), fixed voltage, and fixed frequency AC power to the VSD **104** from an AC power grid or distribution system that is present at a site. The AC power source **102** preferably can supply an AC voltage or line voltage of 200 V, 230 V, 380 V, 460 V, or 600 V, at a line frequency of 50 Hz or 60 Hz, to the VSD **104** depending on the corresponding AC power grid.

The VSD **104** receives AC power having a particular fixed line voltage and fixed line frequency from the AC power source **102** and provides AC power to the motor **106** at a desired voltage and desired frequency, both of which can be varied to satisfy particular requirements. Preferably, the VSD **104** can provide AC power to the motor **106** having higher voltages and frequencies and lower voltages and frequencies than the rated voltage and frequency of the motor **106**. FIG. 2 illustrates schematically some of the components in one embodiment of the VSD **104**. The VSD **104** can have three stages: a converter stage **202**, a DC link stage **204** and an inverter stage **206**. The converter **202** converts the fixed line frequency, fixed line voltage AC power from the AC power source **102** into DC power. The DC link **204** filters the DC power from the converter **202** and provides energy storage components such as capacitors and/or inductors. Finally, the inverter **206** converts the DC power from the DC link **204** into variable frequency, variable voltage AC power for the motor **106**.

The particular configurations of the converter **202**, DC link **204** and inverter **206** are not critical to the present invention so long as the VSD **104** can provide appropriate output voltages and frequencies to the motor **106**. For example, the converter **202** can be a diode or thyristor rectifier coupled to a boost DC/DC converter to provide a boosted DC voltage to the DC link **204** in order to obtain an output voltage from the VSD **104** greater than the input voltage of the VSD **104**. In another example, the converter **202** can be a pulse width modulated boost rectifier having

insulated gate bipolar transistors (IGBTs) to provide a boosted DC voltage to the DC link **204** to obtain an output voltage from the VSD **104** greater than the input voltage of the VSD **104**. In a preferred embodiment of the present invention, the VSD **104** can provide output voltages and frequencies that are at least twice the rated voltage and frequency of the motor **106**. Furthermore, it is to be understood that the VSD **104** can incorporate different components from those shown in FIG. 2 so long as the VSD **104** can provide the motor **106** with appropriate output voltages and frequencies.

The VSD **104** can prevent a large inrush current from reaching the motor **106** during the startup of the motor **106**. The inverter **206** of the VSD **104** can provide the motor **106** with power having about a unity power factor. Finally, the ability of the VSD **104** to adjust both the output voltage and output frequency to the motor **106** permits the VSD **104** to be operated on a variety of foreign and domestic power grids without having to alter the motor **106** or the screw compressor **108** for different power sources.

The motor **106** is preferably an induction motor that is capable of being operated at variable speeds. The induction motor can have any suitable pole arrangement including two poles, four poles or six poles. The induction motor is used to drive a screw compressor **108**. The screw compressor **108** has a variable output capacity that is dependent on the output speed of the motor **106** driving the rotors of the screw compressor **108**. In other words, the output speed of the motor **106** can control the output capacity of the screw compressor **108**. For example, a lower output speed of the motor results in a lower output capacity of the compressor, while a higher output speed of the motor results in a higher output capacity of the compressor. In one embodiment of the present invention, the system and method of the present invention can be used in a refrigeration or chiller system to obtain an increased capacity of the refrigeration or chiller system. FIG. 3 illustrates generally one embodiment of the system of the present invention incorporated in a refrigeration or chiller system.

As shown in FIG. 3, the HVAC, refrigeration or liquid chiller system **300** includes the screw compressor **108**, a condenser **304**, an evaporator **306**, and a control panel **308**. The control panel **308** can include a variety of different components such as an analog to digital (A/D) converter, a microprocessor, a non-volatile memory, and an interface board, to control operation of the refrigeration system **300**. The control panel **308** can also be used to control the operation of the VSD **104**, the motor **106** and the screw compressor **108**. The conventional refrigeration system **300** includes many other features that are not shown in FIG. 3. These features have been purposely omitted to simplify the drawing for ease of illustration.

Screw compressor **108** receives refrigerant vapor at a suction inlet and compresses the refrigerant vapor in the meshing rotors of the screw compressor **108**. The screw compressor **108** then discharges the compressed vapor through a discharge line. As discussed above, the output capacity of the screw compressor **108** is based on the speed of the rotors of the screw compressor **108**, which rotor speed is dependent on the output speed of the motor **106** powered by the VSD **104**. The refrigerant vapor delivered by the compressor **108** to the condenser **304** enters into a heat exchange relationship with a fluid, e.g., air or water, and undergoes a phase change to a refrigerant liquid as a result of the heat exchange relationship with the fluid. The condensed liquid refrigerant from condenser **304** flows through an expansion device (not shown) to an evaporator **306**.

5

The liquid refrigerant in the evaporator 306 enters into a heat exchange relationship with a second fluid, e.g., air or water, to lower the temperature of the second fluid. The refrigerant liquid in the evaporator 306 undergoes a phase change to a refrigerant vapor as a result of the heat exchange relationship with the second fluid. The vapor refrigerant in the evaporator 306 exits the evaporator 306 and returns to the screw compressor 108 by a suction line to complete the cycle. It is to be understood that any suitable configuration of condenser 304 and evaporator 306 can be used in the system 300, provided that the appropriate phase change of the refrigerant in the condenser 304 and evaporator 306 is obtained.

The present invention obtains increased capacity and efficiency from a screw compressor 108 by operating the screw compressor 108 at a speed greater than the screw compressor's rated speed and by not incorporating a slide valve in the screw compressor 108. The maximum operating speed of the screw compressor 108 is related to the maximum operating speed of the motor 106 when operated at a voltage and frequency greater than the motor's rated voltage and frequency in a constant flux or constant volts/Hz mode. When operated at a greater speed than the rated speed for the screw compressor 108, the screw compressor 108 provides a greater seal between the rotors and reduces gas leakage, thereby increasing compressor efficiency. Furthermore, the elimination of the slide valve in the screw compressor results in additional increases in efficiency through the removal of possible leakage passageways for the gas.

The connection of the screw compressor 108 to the motor 106 powered by the variable speed drive 104 permits the screw compressor 108 to be operated at lower speeds and capacities in addition to the higher speeds and capacities. Since the variable speed drive 104 can provide the motor 106 with a reduced input frequency and voltage, the output speed of the motor 106 can be reduced, resulting in a reduced rotor speed of the screw compressor 108 and a corresponding reduced output capacity of the screw compressor 108.

In addition, for a constant torque load such as a screw compressor, the operation of the motor 106 in the constant flux or constant volts/Hz mode at speeds higher or greater than the motor's rated speed can provide more efficient motor operation. When driving constant torque loads, the current drawn by the motor 106 remains relatively constant as the input voltage and frequency to the motor 106 are increased. Since the motor current remains relatively constant, the losses in the motor 106 remain relatively constant. Thus, the output horsepower of the motor 106 is increased while the motor current drawn by the motor 106 and the corresponding losses in the motor 106 have remained substantially the same, which provides for greater motor efficiency than the same motor 106 driven at the rated voltage and frequency of the motor 106.

One embodiment of the present invention for obtaining increased horsepower and efficiency in the motor 106 and increased capacity of the screw compressor 108 involves connecting the motor 106 to a VSD 104 that is capable of providing the motor 106 with an input voltage and input frequency that is greater than the motor's rated voltage and frequency. In one example, the motor 106 can be rated for the corresponding line voltage and line frequency and the VSD 104 can provide an output voltage and output frequency to the motor 106 that is greater than the line voltage and line frequency. Alternatively, the motor 106 can be rated for the corresponding line frequency, and a voltage less than the corresponding line voltage and the VSD 104 can provide

6

an output voltage substantially equal to the line voltage and an output frequency greater than line frequency. In either arrangement, the motor 106 is receiving an input voltage and input frequency that is greater than the motor's rated voltage and frequency.

In addition, since the VSD 104 can provide a variable input voltage and variable input frequency to the motor 106, the motor 106 and the screw compressor 108 can be operated at a variety of different levels depending on the particular requirements of the system. Preferably, a control panel, microprocessor or controller can provide control signals to the VSD 104 to control the operation of the VSD 104 to provide the optimal operational setting for the motor 106 and screw compressor 108 depending on the particular sensor readings received by the control panel. For example, in the refrigeration system 300 of FIG. 3, the control panel 308 can adjust the output voltage and frequency of the VSD 104 to correspond to changing conditions in the refrigeration system 300, i.e., the control panel 308 can increase or decrease the output voltage and frequency of the VSD 104 in response to increasing or decreasing load conditions on the compressor 108 in order to obtain a desired operating speed of the motor 106 and a desired output capacity of the compressor 108.

FIG. 4 illustrates one specific embodiment of a refrigeration system incorporating the present invention. The refrigeration system 400 is a liquid chiller system using R-134a refrigerant to circulate a chilled liquid to various locations in an installation. The refrigeration system 400 includes the following primary components: two or more screw compressors 402 driven by corresponding motors 404 powered by one or more variable speed drives 406; a condenser system 408; an evaporator system 410; economizers 412; and a control panel (not shown). The refrigeration system 400 also includes many other secondary components and features that are not discussed in detail herein. These components have been purposely omitted to simplify the drawing for ease of illustration.

The refrigeration system 400 shown in FIG. 4 includes two compressors 402 to provide refrigerant compression to two parallel refrigerant circuits. The components of each refrigerant circuit are identified with a corresponding suffix of "-1" or "-2" depending on the corresponding refrigerant circuit. For example, the compressor for the first refrigerant circuit is identified by the reference numeral 402-1. In another embodiment, each refrigerant circuit can include more than one compressor 402 connected in parallel. In a further embodiment, the refrigeration system 400 can include additional compressors 402 connected into additional parallel refrigerant circuits. Each screw compressor 402 is a conventional rotary screw compressor with a fixed volume ratio that draws refrigerant gas into the threads of the rotors, compresses the refrigerant gas, and expels the refrigerant gas through a discharge port. The screw compressor 402 has male and female rotors that are machined to fit together with small clearances between individual lobes and flutes. In one embodiment, the rotors will be a 5+7 Lobe combination. The diameter of the rotor can vary between 145.3 mm, 136.4 mm, and 124 mm all of which have an L/D of about 1.4.

In one embodiment, the casing of the screw compressor 402 is gray cast iron and is class 30 for improved leak resistance, improved machining, increased sound dampening, and reduced cost. The suction and discharge connections for the screw compressor 402 are oriented axially and can be ANSI connections for 300-class service. The bearings of the screw compressor 402 can be rolling element ISO

style bearings of a class ABEC 1. For radial loads, the screw compressor **402** can use cylindrical roller bearings. For thrust or axial loads, the screw compressor **402** can use angular contact bearings. In one embodiment, a 3-micron absolute filter for filtering refrigerant is incorporated into the body of the screw compressor **402** and can be externally accessible for replacement. Finally, the screw compressor **402** can have an external hybrid muffler that is constructed of schedule **40** pipe and includes a reactive section that is tuned for a 200 Hz compressor discharge pumping frequency as well as a passive section that includes fiberglass with a Kevlar casing (to absorb higher frequency noise). The muffler can have a length of 25 inches and a diameter of 6 inches. In still another embodiment, the muffler can include only a reactive section and have a length of about 18 inches.

The mechanical screw mechanisms or rotors of each screw compressor **402** are driven by a corresponding motor **404** powered by a corresponding variable speed drive **406**. In one embodiment, the motor **404** is a standard four pole, 138 VAC, 60 Hz, 68.1 Hp induction motor. The motor **404** can be operated in a linear volts/Hz manner to a maximum voltage/frequency of 460VAC/200 Hz, which is a multiple of the rated voltage and frequency of the motor **404**, using a variable speed drive **406**. The variable speed drive **406** is designed to provide the motor **404** operating in the linear volts/Hz manner discussed above with boosted voltage and frequency to provide greater than rated horsepower. The variable speed drive **406** can provide voltages to the motor **404** having a frequency in the range of approximately 20–200 Hz. The load applied to the motor **404** is a substantially constant torque screw compressor load. The motor **404** provides about 169.3 KW (227 Hp) to the load at an efficiency of about 93.5%. The suction gas coming into the compressor **402** can provide cooling for the motor **404**.

In an alternate embodiment, a single variable speed drive (VSD) **406** can power multiple motors **404**. The single VSD **406** powering multiple motors **404** can employ one or two input AC to DC converters, a corresponding DC link for each converter and multiple DC to AC inverter modules for each DC link to provide dedicated output modules for each corresponding compressor motor **404**. For some embodiments of the refrigeration system **400** having 2 or 3 compressors, only one converter and DC link can be used in the single VSD **406**, while a configuration of the refrigeration system **400** having 4 compressors can use two converters and two DC links in the single VSD **406**. The VSD **406** can provide voltages to the motors **404** having a frequency in the range of approximately 20–200 Hz. The boosted voltage for the motors **404**, as described above, can be obtained from the VSD **406** by maintaining the DC link voltage at about 621 VDC to correspond to the AC power source or line voltage. In situations where the nominal distribution voltage is not 480 VAC, an autotransformer can be incorporated into the VSD **406** to adjust the input voltage to 480 VAC for further boosting by the VSD **406**.

A separate cooling system is used for the cooling of the VSD **406**. A brine loop of a propylene glycol—water mixture can preferably be used to cool the VSD **406**. While the propylene glycol—water mixture is preferred, it is to be understood that any suitable brine or cooling liquid, such as an ethylene glycol—water mixture, can be used in the VSD cooling system loop. The warm brine from the VSD cooling system can be cooled with ambient air. Some of the tubes or coils in the condenser system **408** can be allocated for VSD cooling.

The operation of the screw compressors **402** at higher than mains frequency in tandem with an induction motor-

VSD combination that operates in a linear volts/Hz manner yields higher overall efficiencies. This higher efficiency is due to operation of the motor **404** at greater than rated motor nameplate voltage and frequency and operating the screw compressor **402** at greater than rated speed with no slide valve. Elimination of the slide valve reduces leakage and improves reliability. Operation at greater speeds increases the sealing capability of the compressor **402** and improves compressor efficiency.

A compressor **402** can be loaded/unloaded by using the VSD **406** to vary the speed of the motor **404**, which thereby varies the speed of the compressor **402**, and thus the load of the compressor **402**. The loading/unloading of the compressor **402** is essentially infinitely variable between the minimum and maximum speed points for the compressor **402**. The compressor **402** minimum load point corresponds to the VSD **406** providing a corresponding input voltage at about 20 Hz to the motor **404**.

As discussed above, the VSD **406** varies the speed of the motor **404** (and the compressor **402**) to obtain the desired capacity of the compressor **402** in response to control signals received from a control panel. The control panel uses a fuzzy logic control routine to determine the appropriate operating speed for the VSD **406** and the appropriate number of compressors **402** to engage, to obtain the optimum system operation for the particular system conditions. The control panel then sends the appropriate control signals to the VSD **406** to adjust the VSD output. The fuzzy logic control routine receives as inputs the leaving chilled liquid temperature (LCHLT) error, which is the difference between the LCHLT measured at the evaporator **410** and a predetermined setpoint, and the LCHLT error rate, which is the rate of change of the LCHLT error over the sampling period. In addition, the control panel can also determine when the loading and unloading of the compressors **402** should occur using another control algorithm that monitors the discharge pressure of the compressor **402**, the motor current, the suction pressure of the compressor **402** and the motor temperature as inputs.

The condenser system **408** of the refrigeration system **400** is an air-cooled condenser that cools the hot refrigerant gas from the compressors with ambient air to desuperheat, condense and subcool the refrigerant leaving the condenser system **408**. The condenser system **408** includes a plurality of separate coils of copper tubing for each refrigerant circuit, which tubing is smooth on the outside and enhanced on the inside, with aluminum fins surrounding the copper tubing. In other words, each refrigerant circuit has its own set of coils in the condenser system **408**. The coils can be structured in a “V” or “W” configuration. Multiple fans will move the air through the coils based on control instructions received from the control panel to regulate the speed and number of fans in response to particular system conditions. The condenser fan assemblies can be 900 mm, 3-bladed Crowley fans driven by 6-pole, 2 HP motors. Alternatively, the condenser fan assemblies can have 30-inch Revcor forward-swept metal impellers driven by 6-pole, 1.5 HP motors. The condenser system **408** is also used to cool the oil in the system **400**. Some of the copper tubes of the condenser system **408** are dedicated to oil cooling and receive oil from a separate oil circuit. The oil cooled in the condenser system **408** is returned to the compressors **402**.

In an alternate embodiment, the condenser system **408** of the refrigeration system **400** can be a water-cooled condenser instead of an air-cooled condenser. The refrigerant vapor flowing in the condenser coils for each refrigerant circuit, as described above, enters into the heat exchange

relationship with water, flowing through piping connected to a cooling tower. The refrigerant vapor in the condenser system **408** undergoes a phase change to a refrigerant liquid as a result of the heat exchange relationship with the water.

The evaporator system **410** of the refrigeration system **400** has a plurality of separate coils or tubes for each refrigerant circuit. Refrigerant is circulated through the tubes of each circuit and is surrounded by a liquid to be chilled for a cooling load. The evaporator system **410** has piping connections that receive warmed liquid from the cooling load and provide chilled liquid to the cooling load. A secondary liquid, which is preferably water, but can be any other suitable secondary liquid, e.g., ethylene, calcium chloride brine or sodium chloride brine, travels into the evaporator system **410** via a return line and exits the evaporator system **410** via a supply line. The liquid refrigerant in the coils of the separate refrigerant circuits of the evaporator system **410** enter into a heat exchange relationship with the secondary liquid to chill the temperature of the secondary liquid. The refrigerant liquid in the coils of the evaporator system **410** undergoes a phase change to a refrigerant vapor as a result of the heat exchange relationship with the secondary liquid. The vapor refrigerant in the coils of the evaporator system **410** exits the evaporator system **410** and returns to the corresponding compressor **402** of the refrigerant circuit by a suction line to complete the cycle.

Alternatively, the evaporator system **410** can be a flooded evaporator. The flooded evaporator is a shell and tube heat exchanger with the refrigerant on the shell side and the fluid to be cooled flowing inside the tubes. The separate refrigerant circuits can be maintained in the evaporator system **410** by using partitions and barriers in an evaporator shell. The evaporator system **410** can preferably include a heat-exchanger coil having a supply line and a return line connected to the cooling load. The heat-exchanger coil can include a plurality of tube bundles within the evaporator **410**.

The piping for the refrigeration system **400** generally requires larger line sizes for the R-134a refrigerant, which refrigerant will be pumped at higher flow rates to achieve similar capacities to R-22 refrigerant. The refrigeration system **400** incorporates an economizer **412** into each refrigerant circuit to increase system capacity and performance. The economizer **412** is fed by a flash tank that is connected to a port at a specific pressure in the compressor **402** and provides additional capacity/performance gains. In addition, by unloading the compressors **402** through varying speed of the rotors, the economizer **412** can be effective even during unloading operations because the economizer port will never be exposed to suction pressure of the compressor **402**, which reduces performance, and therefore should provide additional performance and capacity to very low loads (within reason). At very light loads, the economizer feed can be closed using a solenoid valve to provide a reduction in the motor load. Furthermore, a flash tank will be used to separate gas from liquid at a partially expanded pressure. Gas will be fed to the economizer **412** from the top of the flash tank. The flash tank is a simple vertical tank with an expansion feed valve from the condenser **408** to provide a partially expanded liquid-gas fluid mixture. Liquid will drain from the flash tank through a second expansion drain valve to the evaporator **410**.

While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many

modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the appended claims.

What is claimed is:

1. A method of increasing the output capacity of a screw compressor, the method comprising the steps of:
 - providing a motor having a predetermined rated operational voltage and frequency, wherein the predetermined rated operational voltage and frequency of the motor generates a predetermined output speed of the motor;
 - providing a variable speed drive capable of supplying a voltage and frequency to the motor greater than the predetermined rated operational voltage and frequency of the motor;
 - connecting a screw compressor to the motor, the screw compressor having a predetermined output capacity in response to operation at the predetermined output speed of the motor;
 - operating the variable speed drive to supply a voltage and frequency to the motor greater than the predetermined rated operational voltage and frequency of the motor, the motor generating an output speed greater than the predetermined output speed of the motor as a result of the supplied voltage and frequency to the motor being greater than the predetermined rated operational voltage and frequency of the motor; and
 - driving the screw compressor at the generated output speed of the motor greater than the predetermined output speed of the motor to obtain an output capacity from the screw compressor greater than the predetermined output capacity of the screw compressor.
2. The method of claim 1 further comprising the step of operating the motor in a constant flux mode of operation.
3. The method of claim 1 further comprising the step of boosting the output voltage of the variable speed drive to be at least twice an input voltage to the variable speed drive.
4. The method of claim 3 wherein the predetermined rated operational voltage of the motor is substantially equal to the input voltage to the variable speed drive.
5. The method of claim 1 wherein the predetermined rated operational voltage of the motor is less than an input voltage to the variable speed drive.
6. The method of claim 1 further comprising the step of eliminating a slide valve for capacity control from the screw compressor.
7. A compression system comprising:
 - a motor having a predetermined rated operational voltage and frequency, the motor being configured to generate a predetermined output speed in response to operation at the predetermined rated operational voltage and frequency;
 - a variable speed drive connected to the motor to power the motor, the variable speed drive being configured to supply a variable output voltage and variable output frequency to the motor, the variable output voltage and variable output frequency ranging between an output voltage and output frequency less than the predetermined rated operational voltage and frequency and an output voltage and output frequency greater than the predetermined rated operational voltage and frequency;

11

a screw compressor connected to the motor, the screw compressor being configured to provide a predetermined output capacity in response to being driven at the predetermined output speed of the motor; and

wherein the motor generates an output speed greater than the predetermined output speed in response to operation at a supplied voltage and frequency greater than the predetermined rated operational voltage and frequency and the screw compressor provides an output capacity greater than the predetermined output capacity in response to being driven at an output speed of the motor greater than the predetermined output speed of the motor.

8. The compression system of claim 7 wherein the variable speed drive is configured to provide an output voltage to the motor greater than an input voltage to the variable speed drive.

9. The compression system of claim 8 wherein the variable speed drive is configured to provide an output voltage to the motor that is at least twice the input voltage to the variable speed drive.

10. The compression system of claim 9 wherein the predetermined rated operational voltage of the motor is substantially equal to the input voltage to the variable speed drive.

11. The compression system of claim 7 wherein the predetermined rated operational voltage of the motor is less than an input voltage to the variable speed drive.

12. The compression system of claim 7 wherein the variable speed drive supplies an output voltage and output frequency to the motor to permit the motor to operate in a constant flux mode of operation.

13. The compression system of claim 7 wherein the screw compressor has increased rotor seal in response to being driven at an output speed of the motor greater than the predetermined output speed of the motor.

14. The compression system of claim 7 wherein the screw compressor is configured to omit a slide valve to reduce gas leakage in the screw compressor.

15. A chiller system comprising:

a first refrigerant circuit, the first refrigerant circuit comprising a first compressor, a first condenser arrangement and a first evaporator arrangement connected in a closed refrigerant loop;

a second refrigerant circuit, the second refrigerant circuit comprising a second compressor, a second condenser arrangement and a second evaporator arrangement connected in a closed refrigerant loop;

a first motor connected to the first compressor to drive the first compressor, the first motor having a predetermined rated operational voltage and frequency, the first motor being configured to drive the first compressor at a predetermined speed in response to the predetermined rated operational voltage and frequency of the first motor being provided to the first motor, and the first compressor having a predetermined capacity in response to being driven at the predetermined speed;

a second motor connected to the second compressor to drive the second compressor, the second motor having a predetermined rated operational voltage and frequency, the second motor being configured to drive the second compressor at a predetermined speed in response to the predetermined rated operational voltage and frequency of the second motor being provided to the second motor, and the second compressor having a predetermined capacity in response to being driven at the predetermined speed;

12

at least one variable speed drive connected to the first motor and the second motor to power the first motor and the second motor; the at least one variable speed drive being configured to supply a variable output voltage and variable output frequency to the first motor and the second motor, the variable output voltage and variable output frequency ranging between an output voltage and output frequency less than the predetermined rated operational voltages and frequencies of the first motor and the second motor and an output voltage and output frequency greater than the predetermined rated operational voltages and frequencies of the first motor and the second motor;

wherein the first motor drives the first compressor at a speed greater than the predetermined speed in response to a supplied output voltage and output frequency from the at least one variable speed drive being greater than the predetermined rated operational voltage and frequency of the first motor, the first compressor provides an output capacity greater than the predetermined output capacity in response to being driven by the first motor at an output speed greater than the predetermined output speed; and

wherein the second motor drives the second compressor at a speed greater than the predetermined speed in response to a supplied output voltage and output frequency from the at least one variable speed drive being greater than the predetermined rated operational voltage and frequency of the second motor, the second compressor provides an output capacity greater than the predetermined output capacity in response to being driven by the second motor at an output speed greater than the predetermined output speed.

16. The chiller system of claim 15 wherein the first compressor and the second compressor are screw compressors.

17. The chiller system of claim 16 wherein the first screw compressor and the second screw compressor each have increased rotor seal in response to being driven at a speed greater than the predetermined speed.

18. The chiller system of claim 16 wherein the first screw compressor and the second screw compressor are configured to omit a slide valve to reduce gas leakage in the first screw compressor and the second screw compressor.

19. The chiller system of claim 15 wherein the at least one variable speed drive comprises:

a first variable speed drive connected to the first motor to power the first motor; and

a second variable speed drive connected to the second motor to power the second motor.

20. The chiller system of claim 15 wherein the at least one variable speed drive comprises a single variable speed drive having a first inverter section connected to the first motor and a second inverter section connected to the second motor.

21. The chiller system of claim 15 wherein the predetermined rated operational voltage and frequency of the first motor and the second motor is 138 VAC and 60 Hz.

22. The chiller system of claim 21 wherein the at least one variable speed drive is configured to supply an output voltage of 460 VAC and an output frequency of 200 Hz to the first motor and the second motor.

23. The chiller system of claim 21 wherein the variable output frequency supplied by the at least one variable speed drive ranges from about 20 Hz to about 200 Hz.

24. The chiller system of claim 15 wherein the first compressor and the second compressor each comprise a muffler system.

13

25. The chiller system of claim 15 wherein the first condenser arrangement and the second condenser arrangement each comprise a portion of a combined condenser system.

26. The chiller system of claim 25 wherein the combined condenser system is air-cooled.

27. The chiller system of claim 15 wherein the first evaporator arrangement and the second evaporator arrangement each comprise a portion of a combined evaporator system.

28. The chiller system of claim 15 further comprising a VSD cooling system to cool the at least one variable speed drive.

29. The chiller system of claim 28 wherein the VSD cooling system comprises a brine loop of an ethylene-glycol and water mixture.

30. The chiller system of claim 28 wherein the VSD cooling system comprises a brine loop of a propylene-glycol and water mixture.

14

31. The chiller system of claim 30 wherein the first condenser arrangement, the second condenser arrangement and the brine loop of the VSD cooling system each comprise a portion of a combined condenser system.

32. The chiller system of claim 31 wherein the combined condenser system is air-cooled.

33. The chiller system of claim 15 wherein:

the first refrigerant circuit comprises a first economizer; and

the second refrigerant circuit comprises a second economizer.

34. The chiller system of claim 33 wherein the first economizer and the second economizer each comprise a flash tank.

35. The chiller system of claim 15 wherein the first refrigerant circuit and the second refrigerant circuit each circulate R-134a refrigerant.

* * * * *